


0.6/1 kV PVC İZOLELİ, YUVARLAK ÇELİK TEL ZIRHLI, ÇOK DAMARLI BAKIR İLETKENLİ KABLOLAR

0.6/1 kV PVC INSULATED, ROUND STEEL WIRE ARMoured, MULTI CORE CABLES WITH COPPER CONDUCTOR

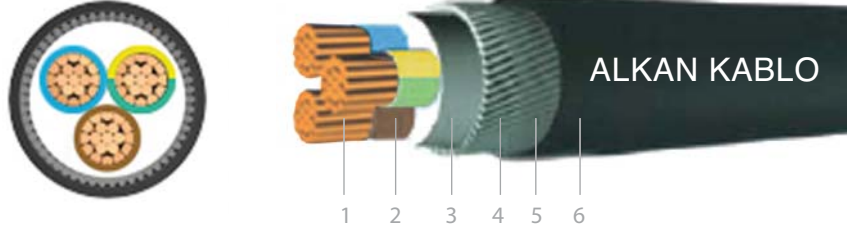

KOD / CODE

YVZ2V-U, YVZ2V-R, CU/PVC/SWA/PVC, NYRY

U: Som İletken

R: Örgülü Rijit İletken

YVZ2V-U, YVZ2V-R, CU/PVC/SWA/PVC, NYRY

U: Solid Conductor

R: Stranded Conductor

STANDARTLAR TS IEC 60502, VDE 0271 BS 6346
STANDARTS TS IEC 60502, VDE 0271 BS 6346

KULLANIM ALANLARI / APPLICATION

GÜÇ MERKEZLERİNDE, ŞALT ve ENDÜSTRİ TESİSLERİNDE, YEREL ENERJİ DAĞITIMINDA GÜÇ KABLOSU OLARAK MEKANİK HASAR RİSKİNİN OLMADIĞI YERLERDE HARİÇTE, DAHİLDE, TOPRAK ALTINDA veya KABLO KANALLARINDA KULLANILIR.

INDOORS and OUTDOORS, IN CABLE DUCKS, UNDERGROUND, IN POWER OR SWITCHING STATIONS, LOCAL ENERGY DISTRIBUTIONS, INDUSTRY PLANTS, WHERE THERE IS NO RISK OF MECHANICAL DAMAGE.

TEKNİK ÖZELLİKLER / TECHNICAL CHARACTERISTIC

ÇALIŞMA SICAKLIĞI (MAKS.) 70°C
OPERATING TEMPERATURE (MAX.) 70°C

KISA DEVRE SICAKLIĞI (MAKS.) 160°C (max. 5 sn.)
OPERATING TEMPERATURE 160°C (max. 5 sec.)

ANMA GERİLİMİ 0.6/1 kV
RATED VOLTAGE 0.6/1 kV

BÜKÜLME YARIÇAPI (min.) 12xDİŞ ÇAP
BENDING RADIUS (min.) 12xOUTER DIAMETER

YAPISI / CONSTRUCTION

BİR VEYA ÇOK TELLİ BAKIR İLETKEN
SOLID OR STRANDED COPPER CONDUCTOR

PVC İZOLE
PVC INSULATION

PVC DOLGU
PVC FILLER

GALVANİZLİ YUVARLAK ÇELİKTEL
GALVANIZED ROUND STEEL WIRES

POLYESTER BANT
POLYESTER TAPE

PVC DİŞ KILIF
PVC OUTER SHEAT

KOD NO CODE NR	NOMİNAL KESİT NOMINAL CROSS-SECTION	BOYUT VE AĞIRLIKLAR (DIMENSIONS AND WEIGHTS)			ELEKTRİKSEL ÖZELLİKLER (ELECTRICAL PROPERTIES)		
		DİŞ ÇAP (yaklaşık) OVERAL DIAMETER (approx.)	NET AĞIRLIK (yaklaşık) NET WEIGHT (approx.)	SEVK UZUNLUĞU DELIVERY LENGHT	İLETKEN DC DİRENCİ 20°C'de max. DC Conductor Resistance at 20°C	AKIM TAŞIMA KAPASİTESİ CURRENT CARRYING CAPACITY	
						mm ²	mm
960 600	3x1.5	14.0	350	1000	12.1	26	18.5
960 601	3x2.5	15.0	420	1000	7.41	34	25
960 602	3x4	17.5	670	1000	4.61	44	34
960 603	3x6	18.5	780	1000	5.08	56	43
960 604	3x10	21.5	1050	1000	1.83	75	60
960 605	3x16	23.5	1300	1000	1.15	98	80
960 606	3x25	27.5	1950	1000	0.727	128	106
960 607	3x35	29.5	2350	1000	0.524	157	131
960 608	3x50	33.5	3050	1000	0.387	185	159
960 609	3x70	38.0	4200	1000	0.268	228	202
960 610	3x95	43.0	5350	500	0.193	275	244
960 611	3x120	46.5	6400	500	0.153	313	282
960 612	3x150	52.0	8150	500	0.124	353	324
960 613	3x185	57.0	9750	500	0.0991	399	371
960 614	3x240	64.0	12250	250	0.0754	464	436
960 615	3x300	72.0	15000	250	0.0601	524	481
960 616	3x400	82.0	20000	250	0.0470	600	560