
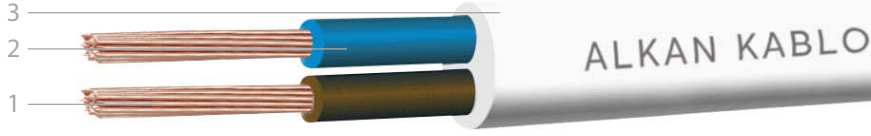


PVC İZOLELİ, ÇOK DAMARLI BAKIR İLETKENLİ KABLOLAR

PVC INSULATED, MULTICORE CABLES WITH FLEXIBLE COPPER CONDUCTOR



KOD / CODE

H03VV-F, H05VV-F, NYMHY-rd, CU/PVC/PVC (TTR)

F: İnce Çok Telli İletken

H03VV-F, H05VV-F, NYMHY-rd, CU/PVC/PVC

F: Fine-Stranded Conductor

STANDARTLAR

TS EN 50525-2-11

STANDARTS

TS EN 50525-2-11

KULLANIM ALANLARI / APPLICATION

AZ MEKANİK ZORLAMALARIN BULUNDUĞU KAPALI VE KURU YERLERDE,
EV ALETLERİNDE, BUHARLI VE RUTUBETLİ YERLERDE KULLANILIR.

FOR HOUSEHOLD APPLIANCES (REFRIGERATORS, SPIN DRYERS, ETC.) UNDER
MEDIUM MECHANICAL STRESSES, ALSO IN DAMP AND WET SPACES.

TEKNİK ÖZELLİKLER / TECHNICAL CHARACTERISTIC

ÇALIŞMA SICAKLIĞI (MAKS.) 70°C

OPERATING TEMPERATURE (MAX.) 70°C

KISA DEVRE SICAKLIĞI (MAKS.) 160°C (max. 5 sn.)

OPERATING TEMPERATURE 160°C (max. 5 sec.)

ANMA GERİLİMİ

300/300 V, 300/500 V

RATED VOLTAGE

300/300 V, 300/500 V

YAPISI / CONSTRUCTION

İNCE ÇOK TELLİ BAKIR İLETKEN

FINE-STRANDED COPPER CONDUCTOR

PVC İZOLE

PVC INSULATION

PVC DIŞ KILIF

PVC OUTER SHEATH

KOD NO CODE NR	NOMİNAL KESİT NOMINAL CROSS-SECTION	BOYUT VE AĞIRLIKLAR (DIMENSIONS AND WEIGHTS)			ELEKTRİKSEL ÖZELLİKLER (ELECTRICAL PROPERTIES)	
		DIŞ ÇAP (yaklaşık) OVERAL DIAMETER (approx.)	NET AĞIRLIK (yaklaşık) NET WEIGHT (approx.)	SEVK UZUNLUĞU DELIVERY LENGHT	İLETKEN DC DİRENCİ 20°C'de max. DC Conductor Resistance at 20°C	AKIM TAŞIMA KAPASİTESİ CURRENT CARRYING CAPACITY
	mm ²	mm	kg/km	m	(ohm/km)	A
930 020	2x0.50*	5.0	35	100	39.0	8
930 001	2x0.75	6.2	55	100	26.0	13
930 010	2x1.0	6.6	65	100	19.5	16
930 004	2x1.5	7.6	90	100	13.3	20
930 007	2x2.5	9.2	130	100	7.98	27
930 014	2x4.0	11.0	180	100	4.95	34
930 021	3x0.50*	5.4	40	100	39.0	8
930 003	3x0.75	6.5	65	100	26.0	13
930 011	3x1.0	7.2	80	100	19.5	16
930 002	3x1.5	8.5	110	100	13.3	20
930 005	3x2.5	10.0	165	100	7.98	27
930 015	3x4.0	11.4	230	100	4.95	34
930 022	4x0.50*	5.8	50	100	39.0	8
930 009	4x0.75	7.1	75	100	26.0	13
930 012	4x1.0	7.8	95	100	19.5	16
930 008	4x1.5	9.5	140	100	13.3	20
930 006	4x2.5	11.0	200	100	7.98	27
930 019	4x4.0	12.5	290	100	4.95	34
930 023	5x0.75	8.0	100	100	26.0	13
930 024	5x1.0	8.5	115	100	19.5	16
930 025	5x1.5	10.5	170	100	13.3	20
930 026	5x2.5	12.5	260	100	7.98	27
930 027	5x4.0	14.5	370	100	4.95	34

*300/300V H03VV-F

